




PVC Wire (SS 358)

UNTINNED ANNEALED COPPER

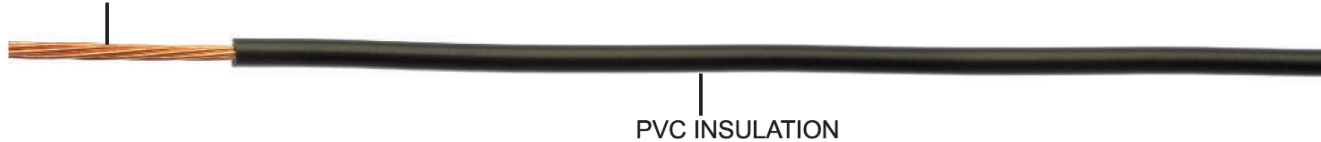

VOLTAGE RATING : 450/750V

TEMPERATURE RATING : 70°C

Size (mm ²)	Conductor	Insulation (PVC) Thickness (mm)	Approx OD (mm)	Conductor Resistance Ohm/Km (25°C)	Insulation Resistance Mohm/Km (Min.)
1.5mm ²	7/0.53mm	0.70	2.99	12.34	10
2.5mm ²	7/0.67mm	0.80	3.61	7.55	10
4.0mm ²	7/0.85mm	0.80	4.15	4.70	10

PVC Twin Twisted Cable (SS 358)

UNTINNED ANNEALED COPPER



VOLTAGE RATING : 450/750V

TEMPERATURE RATING : 70°C

Size (mm ²)	Conductor	No. of Cores	Insulation (PVC) Thickness (mm)	Approx OD (mm)	Conductor Resistance Ohm/Km (25°C)	Insulation Resistance Mohm/Km (Min.)
1.5mm ²	7/0.53mm	2	0.70	5.89	12.34	10
2.5mm ²	7/0.67mm	2	0.80	7.22	7.55	10
4.0mm ²	7/0.85mm	2	0.80	8.30	4.70	10