




UL2092/UL2094 Double Screen Cable (RS485)

ASSEMBLY :
TINNED ANNEALED COPPER,PE INSULATED, CONDUCTOR CABLE, OVERALL ALUMINIUM-POLYESTER SHIELD AND TINNED COPPER DRAIN WIRE, TINNED COPPER BRAID, PVC JACKET .

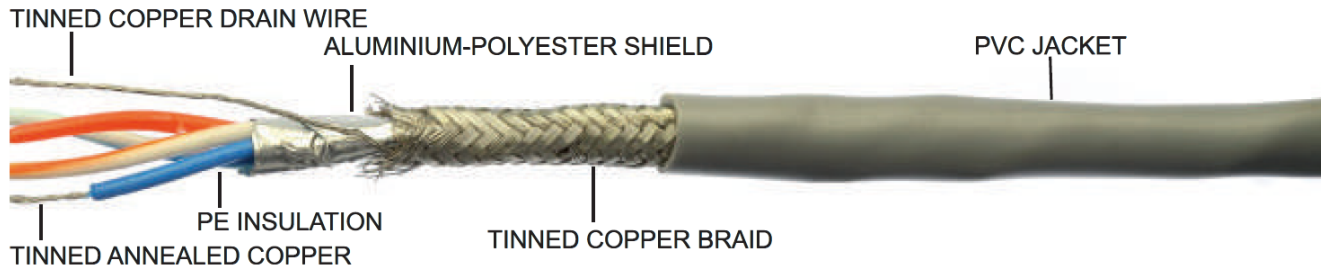

VOTAGE : 300/500V

TEMPERATURE RATING : 60 °C

NOM IMPEDANCE : 120 Ohm

COPPER SIZE : AWG24 (7/0.20mm)

No. of Pairs	Type	Insulation (PE) Thickness (mm)	Jacket (PVC) Thickness (mm)	Approx OD (mm)	Conductor Resistance Ohm/Km (25°C)	Insulation Resistance Mohm/Km (Min.)	Nominal Capacitance (pF/ft)
1	UL2092	0.78	0.70	6.56	95.28	5000	12.8
2	UL2094	0.78	0.80	9.80	95.28	5000	12.8
3	UL2094	0.78	0.90	10.65	95.28	5000	12.8
4	UL2094	0.78	1.00	11.71	95.28	5000	12.8
5	UL2094	0.78	1.10	13.21	95.28	5000	12.8
6	UL2094	0.78	1.10	13.64	95.28	5000	12.8
7	UL2094	0.78	1.10	13.64	95.28	5000	12.8
8	UL2094	0.78	1.10	14.94	95.28	5000	12.8

The above color code is for reference only.
This information provides a general description of products and shall not form part of any contract.
Improvements or changes may be made to the products without advanced notification.