



UL2464 Control Cable

ASSEMBLY :
TINNED ANNEALED COPPER, PVC INSULATED, CONDUCTORS CABLED, PVC JACKET.



VOLTAGE : 300/500V

TEMPERATURE RATING : 80°C

SIZE : 7/0.254mm (AWG 22)

No. of Cores	Insulation (PVC) Thickness (mm)	Jacket (PVC) Thickness (mm)	Approx OD (mm)	Conductor Resistance Ohm/Km (25°C)	Insulation Resistance Mohm/Km (Min.)
3	0.40	0.76	4.88	56.10	10
4	0.40	0.76	5.29	56.10	10
5	0.40	0.76	5.73	56.10	10
6	0.40	0.76	6.20	56.10	10
7	0.40	0.76	6.20	56.10	10
8	0.40	0.76	6.68	56.10	10
9	0.40	0.80	7.24	56.10	10
10	0.40	0.80	7.84	56.10	10

SIZE : 7/0.31mm (AWG 20)

No. of Cores	Insulation (PVC) Thickness (mm)	Jacket (PVC) Thickness (mm)	Approx OD (mm)	Conductor Resistance Ohm/Km (25°C)	Insulation Resistance Mohm/Km (Min.)
3	0.40	0.76	5.38	35.30	10
4	0.40	0.76	5.70	35.30	10
5	0.40	0.76	6.19	35.30	10
6	0.40	0.76	6.71	35.30	10
7	0.40	0.76	6.71	35.30	10
8	0.40	0.76	7.24	35.30	10
9	0.40	0.80	7.85	35.30	10
10	0.40	0.80	8.52	35.30	10
12	0.40	0.90	9.09	35.30	10
20	0.40	1.00	11.28	35.30	10

The above color code is for reference only.
This information provides a general description of products and shall not form part of any contract.
Improvements or changes may be made to the products without advanced notification.



UL2464 Control Cable

ASSEMBLY :
TINNED ANNEALED COPPER, PVC INSULATED, CONDUCTORS CABLED, PVC JACKET.



VOLTAGE : 300/500V

TEMPERATURE RATING : 80°C

SIZE : 17/0.254mm (AWG 18)

No. of Cores	Insulation (PVC) Thickness (mm)	Jacket (PVC) Thickness (mm)	Approx OD (mm)	Conductor Resistance Ohm/Km (25°C)	Insulation Resistance Mohm/Km (Min.)
3	0.45	0.76	6.07	22.20	10
4	0.45	0.76	6.61	22.20	10
5	0.45	0.76	7.22	22.20	10
6	0.45	0.80	7.93	22.20	10
7	0.45	0.80	7.93	22.20	10
8	0.45	0.85	8.67	22.20	10
9	0.45	0.85	9.42	22.20	10
10	0.45	0.90	10.34	22.20	10
12	0.45	0.90	10.67	22.20	10
16	0.45	1.00	12.02	22.20	10
20	0.45	1.10	13.49	22.20	10
30	0.45	1.20	16.03	22.20	10

SIZE : 18/0.31mm (AWG 16)


No. of Cores	Insulation (PVC) Thickness (mm)	Jacket (PVC) Thickness (mm)	Approx OD (mm)	Conductor Resistance Ohm/Km (25°C)	Insulation Resistance Mohm/Km (Min.)
4	0.50	0.80	7.68	14.00	10
6	0.50	0.80	9.16	14.00	10
8	0.50	0.90	10.23	14.00	10
10	0.50	1.00	12.18	14.00	10
12	0.50	1.00	12.47	14.00	10
14	0.50	1.10	13.32	14.00	10
16	0.50	1.10	14.14	14.00	10

The above color code is for reference only.
This information provides a general description of products and shall not form part of any contract.
Improvements or changes may be made to the products without advanced notification.



UL2464 Control Cable

ASSEMBLY : UNTINNED ANNEALED COPPER,PVC INSULATED,CONDUCTORS CABLED,
POLYESTER TAPE, PVC JACKET.

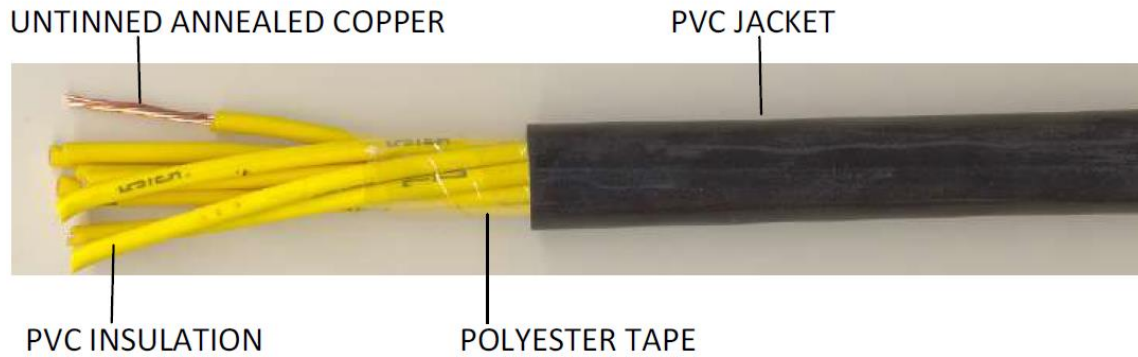

VOLTAGE RATING : 300/500V

TEMPERATURE : 80°C

COPPER SIZE : 30/0.18mm(0.75mm²)

No. Of Cores	Insulation (PVC) Thickness (mm)	Jacket (PVC) Thickness (mm)	Approx. OD (mm)	Conductor Resistance Ohm/Km (25°C)	Insulation Resistance Mohm/Km (Min)
2	0.40	1.00	6.08	25.60	10
4	0.40	1.00	6.88	25.60	10
6	0.40	1.00	8.02	25.60	10
7	0.40	1.00	8.02	25.60	10
8	0.40	1.10	8.81	25.60	10
10	0.40	1.10	10.06	25.60	10
12	0.40	1.20	10.56	25.60	10
16	0.40	1.20	11.62	25.60	10
18	0.40	1.20	12.10	25.60	10
20	0.40	1.20	12.89	25.60	10
30	0.40	1.30	15.14	25.60	10

The above color code is for reference only.
This information provides a general description of products and shall not form part of any contract.
Improvements or changes may be made to the products without advanced notification.