




# UL2464 Cable

ASSEMBLY :  
TINNED ANNEALED COPPER, PVC INSULATED, TWO CORES TWISTED, PVC JACKET.

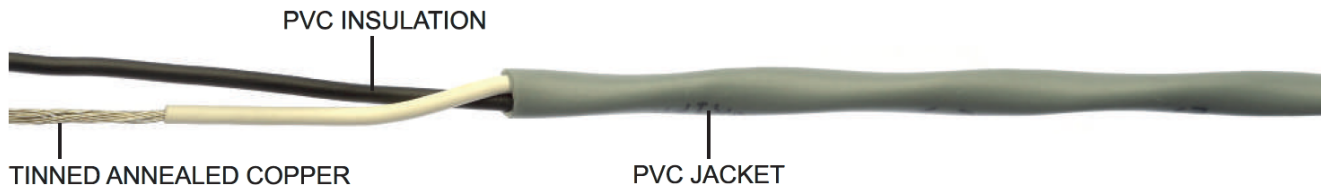

VOLTAGE : 300/500V

TEMPERATURE RATING : 80°C

Size	No. Of Pairs	Insulation (PVC) Thickness (mm)	Jacket (PVC) Thickness (mm)	Approx OD (mm)	Conductor Resistance Ohm/Km (25°C)	Insulation Resistance Mohm/Km (Min.)
AWG 16 (26/0.254mm)	1	0.50	0.76	6.52	14.00	10
AWG 18 (17/0.254mm)	1	0.45	0.76	5.74	22.20	10
AWG 20 (7/0.31mm)	1	0.40	0.76	4.98	35.30	10
AWG 22 (7/0.254mm)	1	0.40	0.76	4.64	56.10	10
AWG 24 (7/0.20mm)	1	0.40	0.76	4.32	95.28	10

# UL2117 Cable

ASSEMBLY :  
TINNED ANNEALED COPPER, PVC INSULATED, TWO CORES TWISTED, PVC JACKET.

VOLTAGE : 600/1000V

TEMPERATURE RATING : 80°C

Size	No. Of Pairs	Insulation (PVC) Thickness (mm)	Jacket (PVC) Thickness (mm)	Approx OD (mm)	Conductor Resistance Ohm/Km (25°C)	Insulation Resistance Mohm/Km (Min.)
AWG 12 (21/0.45mm)	1	0.80	0.80	9.56	5.53	10
AWG 14 (41/0.254mm)	1	0.80	0.80	8.56	8.78	10
2.5 mm <sup>2</sup> (50/0.254mm)	1	0.80	0.80	8.94	8.78	10